



后芮驷(上海)电子有限公司

Horus International Electronics Co., LTD.

# 承认书

## SPECIFICATION FOR APPROVAL

编号:

|      |               |                              |
|------|---------------|------------------------------|
| 品名   | DESCRIPTION:  | <u>金属板微电阻</u>                |
| 规格   | SPEC :        | <u>HRS-MUXXXXXXXXXXXXXXX</u> |
| 包装   | PACKAGE:      | <u>卷装</u>                    |
| 客户   | CUSTOMER:     | <u></u>                      |
| 客户料号 | CUSTOMER P/N: | <u></u>                      |


| APPROVED BY         |                                                                                                                 |
|---------------------|-----------------------------------------------------------------------------------------------------------------|
| <div>CUSTOMER</div> | <div><div>HORUS</div></div> |



# MU Series Metal Plate Ultra Low-Resistance Resistor Product Specifications

|              |               |
|--------------|---------------|
| Document No. | S-10-12-84-01 |
| Revised Date | 2021/07/21    |
| Page No.     | 1/8           |

## ■ Metal Plate Ultra Low Resistance Chip Resistor — MU Series

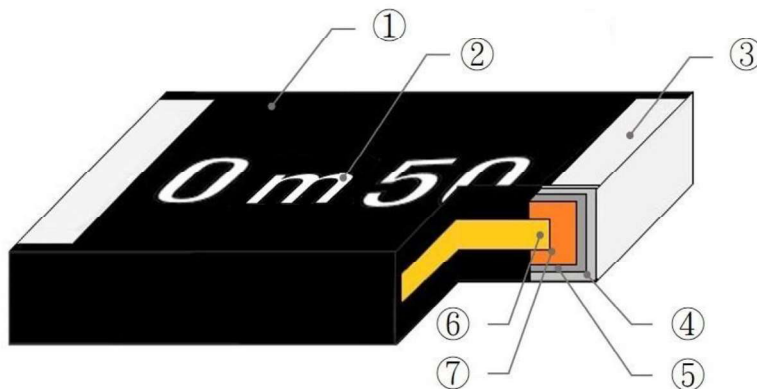

|   |                  |   |            |   |             |   |            |
|---|------------------|---|------------|---|-------------|---|------------|
| 1 | Protective Layer | 3 | Terminal   | 5 | Ni Plating  | 7 | Cu Plating |
| 2 | Marking          | 4 | Sn Plating | 6 | Metal Plate |   |            |

### ■ Application

- Entertainment equipment
- Power Supply
- Measuring instrument
- Industrial equipment
- Battery management system

### ■ Features

- Low Resistance(down to 0.3mR) /  
Low TCR(down to 50ppm)  
Ultra Low TCR(down to 30ppm)  
Low Inductance( $\leq 5\text{nH}$ )
- Excellent long term stability
- RoHs compliant and halogen & Lead free.
- High precision current sensing and voltage division.
- AEC-Q200 Compliant

### ■ Parts Number Explanation

#### ■ Example:

|              |                     |                                         |                                                                                 |                                            |                      |                                                   |
|--------------|---------------------|-----------------------------------------|---------------------------------------------------------------------------------|--------------------------------------------|----------------------|---------------------------------------------------|
| MU           | 2512                | 20                                      | F                                                                               | R001                                       | M                    | Z                                                 |
| Product Type | Size (Inch)<br>2512 | Rated Power<br>20= 2.00 W<br>30= 3.00 W | Tolerance<br>D : $\pm 0.5\%$<br>F : $\pm 1\%$<br>G : $\pm 2\%$<br>J : $\pm 5\%$ | Resistance<br>0m30= 0.3 mR<br>R002= 2.0 mR | Material<br>M : MnCu | Optional<br>Z : Default code<br>U : Ultra Low TCR |



# MU Series Metal Plate Ultra Low-Resistance Resistor Product Specifications

|              |               |
|--------------|---------------|
| Document No. | S-10-12-84-01 |
| Revised Date | 2021/07/21    |
| Page No.     | 2/8           |

## ■ Standard Electrical Specifications

| Type   | Rating Power at 70℃ | T.C.R. (ppm/℃) | Max. Rating Current | Max. Overload Current | Resistance Range (mΩ) |                                  | Material       | Operating Temperature Range (℃) |
|--------|---------------------|----------------|---------------------|-----------------------|-----------------------|----------------------------------|----------------|---------------------------------|
|        |                     |                |                     |                       | 0.5%(D)               | 1.0% (F)<br>2.0% (G)<br>5.0% (J) |                |                                 |
| MU2512 | 2W                  | ≦±150          | 81.65A              | 182.57A               |                       | 0.3                              | 0.3mR~2mR:MnCu | - 55 ~ + 170                    |
|        |                     | ≦±75           | 63.24A              | 141.42A               |                       | 0.5                              |                |                                 |
|        |                     | ≦±50           | 44.72A              | 100A                  | 1~2                   | 1~2                              |                |                                 |
|        | 3W                  | ≦±150          | 100A                | 223.6A                |                       | 0.3                              | 0.3mR~2mR:MnCu |                                 |
|        |                     | ≦±75           | 77.46A              | 173.20A               |                       | 0.5                              |                |                                 |
|        |                     | ≦±50           | 54.77A              | 122.47A               | 1~2                   | 1~2                              |                |                                 |

## ■ Ultra Low TCR Electrical Specifications


| Type   | Rating Power at 70℃ | T.C.R. (ppm/℃) | Max. Rating Current | Max. Overload Current | Resistance Range (mΩ) |                                  | Material       | Operating Temperature Range (℃) |
|--------|---------------------|----------------|---------------------|-----------------------|-----------------------|----------------------------------|----------------|---------------------------------|
|        |                     |                |                     |                       | 0.5%(D)               | 1.0% (F)<br>2.0% (G)<br>5.0% (J) |                |                                 |
| MU2512 | 2W                  | ≦±100          | 81.65A              | 182.57A               |                       | 0.3                              | 0.3mR~2mR:MnCu | - 55 ~ + 170                    |
|        |                     | ≦±50           | 63.24A              | 141.42A               |                       | 0.5                              |                |                                 |
|        |                     | ≦±30           | 44.72A              | 100A                  | 1~2                   | 1~2                              |                |                                 |
|        | 3W                  | ≦±100          | 100A                | 223.6A                |                       | 0.3                              | 0.3mR~2mR:MnCu |                                 |
|        |                     | ≦±50           | 77.46A              | 173.20A               |                       | 0.5                              |                |                                 |
|        |                     | ≦±30           | 54.77A              | 122.47A               | 1~2                   | 1~2                              |                |                                 |



# MU Series Metal Plate Ultra Low-Resistance Resistor Product Specifications

|              |               |
|--------------|---------------|
| Document No. | S-10-12-84-01 |
| Revised Date | 2021/07/21    |
| Page No.     | 3/8           |

## ■ Type Dimension



## ■ Dimension

Unit : mm


| Series Size | Power Rating | Resistance Range | L          | W          | H          | T          |
|-------------|--------------|------------------|------------|------------|------------|------------|
| MU2512      | 2W           | 0.3mΩ            | 6.35±0.254 | 3.10±0.254 | 1.25±0.254 | 2.55±0.254 |
|             |              | 0.5mΩ            |            |            | 1.25±0.254 | 1.70±0.254 |
|             |              | 1mΩ              |            |            | 0.65±0.254 | 1.40±0.254 |
|             |              | 2mΩ              |            |            | 0.35±0.254 | 1.40±0.254 |
|             | 3W           | 0.3mΩ            |            |            | 1.25±0.254 | 2.55±0.254 |
|             |              | 0.5mΩ            |            |            | 1.25±0.254 | 1.70±0.254 |
|             |              | 1mΩ              |            |            | 0.65±0.254 | 1.40±0.254 |
|             |              | 2mΩ              |            |            | 0.35±0.254 | 1.40±0.254 |

## ■ Performance Characteristics

### Power Derating Curve

The Operating Temperature Range: -55°C ~+170°C.

For resistors operated in ambient temperatures above 70°C, power rating must be derating in accordance with the curve as below :

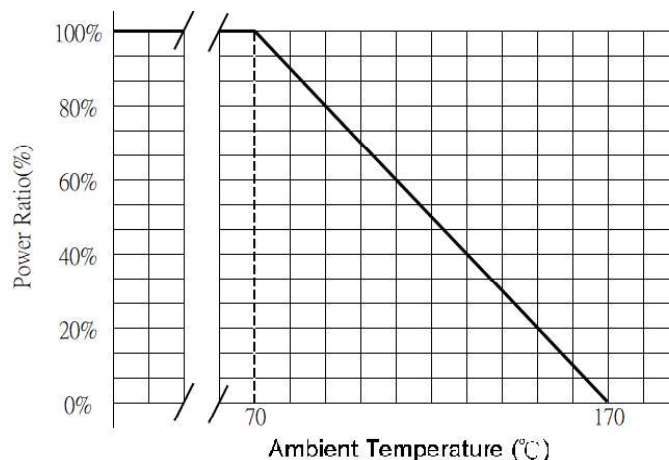



## MU Series Metal Plate Ultra Low-Resistance Resistor Product Specifications

|              |               |
|--------------|---------------|
| Document No. | S-10-12-84-01 |
| Revised Date | 2021/07/21    |
| Page No.     | 4/8           |

### ■ Rating Current

The following equation may be used to determine the DC (Direct Current) or AC (Alternating Current) (RMS, root mean square value) of normal rated power. However, if the result value exceeds the highest current of regulated standards, the highest normal rated power is to be used

$$I = \sqrt{P/R}$$

I = Rating current (A)  
P= Rating Power (W)  
R= Resistance( $\Omega$ )

■ Inductance characteristics:  $\leq 5\text{nH}$ (Circuit frequency is below 1MHz)

### ■ Marking Format:

- 2512 2W and 3W 0.3mR no marking.
- The Others marking are 4 digits.
- “R” designates the decimal location in ohms  
e.g. 2m $\Omega$  the product marking is R002.
- “m” designates the decimal location in milli-ohms  
e.g. 0.5m $\Omega$  the product marking is 0m50.
- The criteria to distinguishing the mark on the surface of products are that characters can be identified.



# MU Series Metal Plate Ultra Low-Resistance Resistor Product Specifications

|              |               |
|--------------|---------------|
| Document No. | S-10-12-84-01 |
| Revised Date | 2021/07/21    |
| Page No.     | 5/8           |

## ■ Reliability Test and Requirement

| Test Item                                     | Test Method                             | Procedure                                                                                                                                                                                  | Requirements                              |
|-----------------------------------------------|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|
| Temperature Coefficient of Resistance (T.C.R) | JIS-C-5201-1 4.8<br>IEC-60115-1 4.8     | At 25°C / +125°C, 25°C is the reference temperature                                                                                                                                        | Refer to Ratings                          |
| Short Time Overload                           | JIS-C-5201-1 4.13<br>IEC-60115-1 4.13   | The number of rated power are as follows:<br><ul style="list-style-type: none"> <li>MU2512-2W: 5 times of rated power</li> <li>MU2512-3W: 5 times of rated power for 5 seconds.</li> </ul> | $\Delta R/R1 \leq \pm 1.0\%$              |
| High Temperature Exposure                     | JIS-C5201-1 4.25<br>IEC 60068-2-2       | At 170°C for 1000 hours.                                                                                                                                                                   | $\Delta R/R1 \leq \pm 1.0\%$              |
| Resistance to Soldering Heat                  | JIS-C-5201-1 4.18<br>IEC-60115-1 4.18   | 260±5°C for 10 seconds.                                                                                                                                                                    | $\Delta R/R1 \leq \pm 0.5\%$              |
| Temperature Cycling                           | JESD22 Method JA-104                    | 1000 Cycles (-55°C to +155°C) Measurement at 24±4 hours after test conclusion. 30min maximum dwell time at each temperature extreme.                                                       | $\Delta R/R1 \leq \pm 1.0\%$              |
| Biased Humidity                               | MIL-STD-202 Method 103                  | 1,000 hours; 85°C / 85% RH, 10% of operating power. Measurement at 24±4 hours after test conclusion.                                                                                       | $\Delta R/R1 \leq \pm 1.0\%$              |
| Load Life (Endurance)                         | JIS-C-5201-1 4.25<br>IEC-60115-1 4.25.1 | 70±2°C, RCWV or Max. working voltage whichever is less for 1000 hrs with 1.5 hrs "ON" and 0.5 hr "OFF" .                                                                                   | $\Delta R/R1 \leq \pm 1.0\%$              |
| Solderability                                 | JIS-C-5201-1 4.17<br>IEC-60115-1 4.17   | 245±5°C for 3 seconds.                                                                                                                                                                     | >95% coverage                             |
| Dielectric Withstanding Voltage               | JIS-C5201-1 4.7                         | Applied 500VAC for 1 minute.                                                                                                                                                               | No short or burned on the appearance.     |
| Core Body Strength                            | JIS-C5201-1 4.15                        | Central part pressurizing force : 5N , 10 seconds                                                                                                                                          | No broken                                 |
| Terminal Strength (SMD)                       | AEC Q200-006                            | Pressurizing force : 17.7N , 60 seconds                                                                                                                                                    | No broken                                 |
| Bending Strength                              | JIS-C-5201-1 4.33<br>IEC-60115-1 4.33   | Bending once for 2mm , 10 seconds                                                                                                                                                          | $\Delta R/R1 \leq \pm 0.5\%$<br>No broken |
| Moisture Resistance                           | MIL-STD 202 Method 106                  | T=24 hours / Cycle , 10Cycles .<br>Steps 7a& 7b not required. Unpowered .<br>(Figure 1)                                                                                                    | $\Delta R/R1 \leq \pm 0.5\%$              |




# MU Series Metal Plate Ultra Low-Resistance Resistor Product Specifications

Document No. S-10-12-84-01



Revised Date 2021/07/21

Page No. 6/8

Figure 1

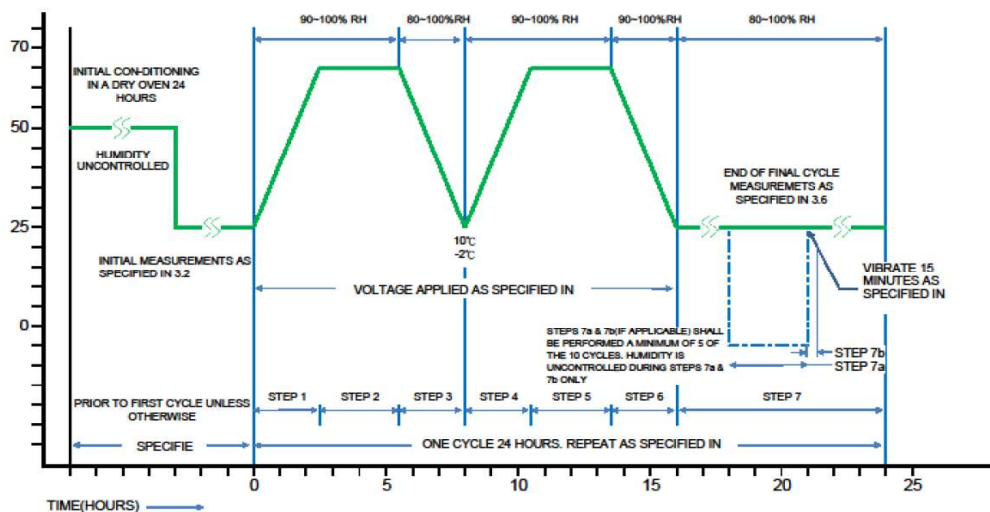

## Soldering Profile

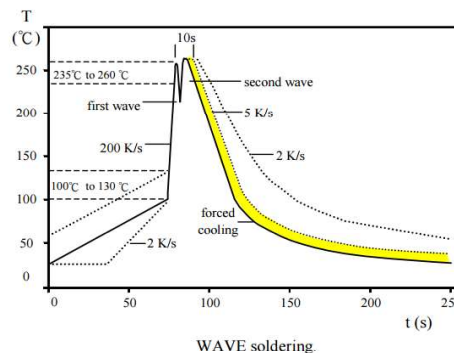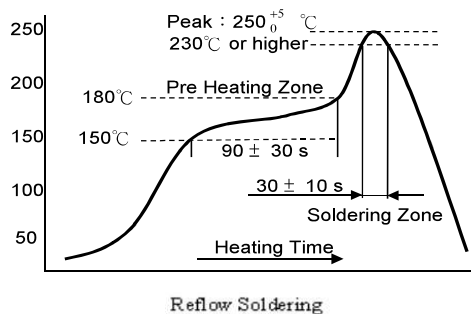




# MU Series Metal Plate Ultra Low-Resistance Resistor Product Specifications

|              |               |
|--------------|---------------|
| Document No. | S-10-12-84-01 |
| Revised Date | 2021/07/21    |
| Page No.     | 7/8           |

## ■ Recommend Land Pattern Design

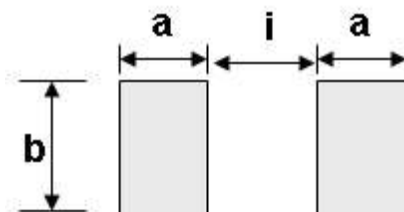

## ■ Dimension

Unit: mm

| TYPE           | Resistance Range | a    | b    | i    |
|----------------|------------------|------|------|------|
| MU2512 – 2W/3W | 0.3mΩ            | 2.80 | 3.55 | 2.00 |
| MU2512 – 2W/3W | 0.5mΩ            | 2.80 | 3.55 | 2.00 |
| MU2512 – 2W/3W | 1mΩ              | 2.70 | 3.55 | 2.90 |
| MU2512 – 2W/3W | 2mΩ              | 2.40 | 3.55 | 2.00 |

## ■ Packing Quantity

| TYPE                    | PCS /Reel |
|-------------------------|-----------|
| MU2512-2W/3W,1m~2mR     | 4,000     |
| MU2512-2W/3W,0.3m~0.5mR | 2,000     |




# MU Series Metal Plate Ultra Low-Resistance Resistor Product Specifications

|              |               |
|--------------|---------------|
| Document No. | S-10-12-84-01 |
| Revised Date | 2021/07/21    |
| Page No.     | 8/8           |

## Appendix For SMD Chip Resistor

### ● Packaging Information

#### ■ Reel Dimensions

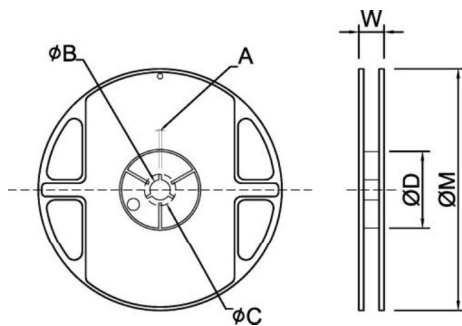


#### ■ Dimension

Unit: mm

| Reel Type / Tape           | A       | φB       | φC       | φD       | W        | φM      |
|----------------------------|---------|----------|----------|----------|----------|---------|
| 7" reel for 12 mm embossed | 2.5±0.5 | 13.5±0.5 | 17.7±0.5 | 60.0±0.5 | 16.2±0.5 | 178±1.0 |

#### ■ Embossed Dimensions

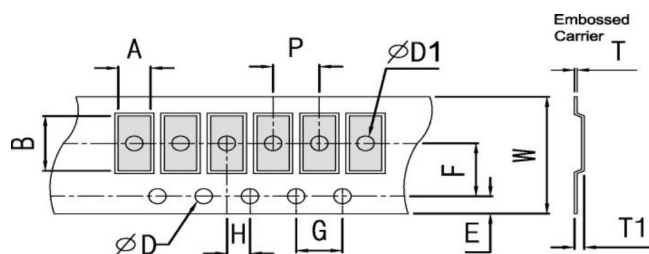

#### ■ Dimension

Unit: mm

| Item                          | W         | P        | E         | F        | φD       | φD1       | G        | H        | A         | B         | T1        | T         |
|-------------------------------|-----------|----------|-----------|----------|----------|-----------|----------|----------|-----------|-----------|-----------|-----------|
| MU2512<br>2W/3W<br>1m~2mR     | 12.0±0.30 | 4.0±0.10 | 1.75±0.10 | 5.5±0.10 | 1.50±0.1 | 1.55±0.10 | 4.0±0.10 | 2.0±0.10 | 3.50±0.10 | 6.75±0.10 | 0.90±0.20 | 0.20±0.10 |
| MU2512<br>2W/3W<br>0.3m~0.5mR | 12.0±0.30 | 4.0±0.10 | 1.75±0.10 | 5.5±0.10 |          | 1.55±0.10 | 4.0±0.10 | 2.0±0.10 | 3.50±0.10 | 6.75±0.10 | 1.45±0.20 | 0.20±0.10 |

### ■ Storage Temperature

Temperature : 25±5°C, Humidity : 60±20%