
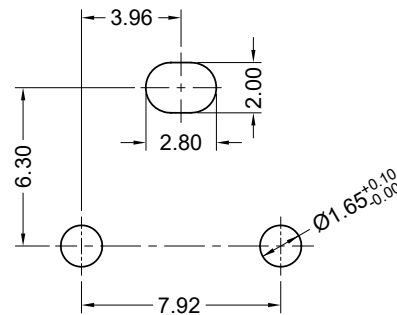
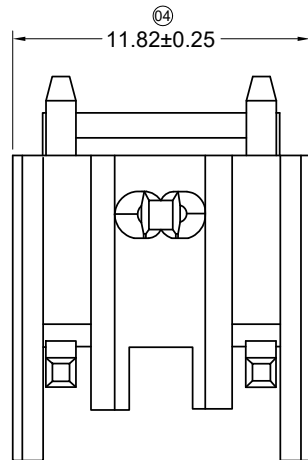
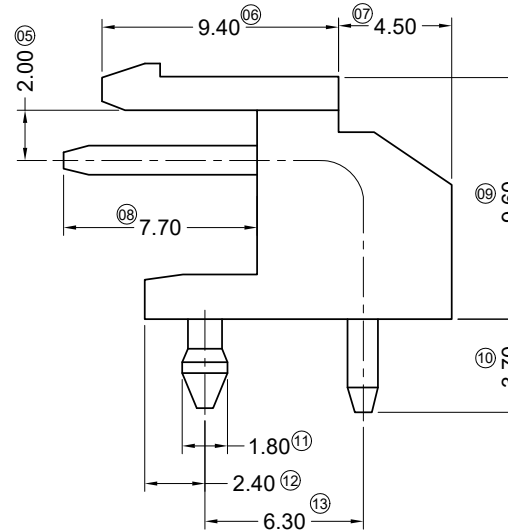


RoHS

This products can apply to the HRS Doc NO. QA-3-04-005
of Environmental&Material Management Rules

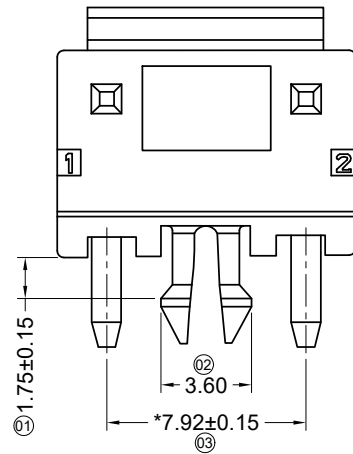

Recommended P.C.B Layout
General Tolerance ± 0.05

Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 7A AC / DC
- Withstanding voltage: 1500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: $\geq 1000\text{M}\Omega$
- Contact resistance: $\leq 10\text{m}\Omega$
- After environmental testing: $\leq 20\text{m}\Omega$

- Material(Pin): Brass
- Mates With HRS Housing: HRS-9396H

HRS-9396 W R X-02 S1-XX SN XX-T

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

- ① Series No.
- ② Category: W-Wafer
- ③ Connector Type: R- Right Angle 90°
- ④ Mounting Type: Blank-DIP
- ⑤ Row No.-Pin No Per Row: 02-02P
- ⑥ Special No.: S1-With Post and Locking Block
- ⑦ Material: N0-PA66 94V-0 ;PT-PBT 94V-0
- ⑧ Planting Code: SN-Bright Tin
- ⑨ Color: Blank-Natural Color ; Bk-Black
- ⑩ T-With Mark

						GENERAL TOLERANCE	Horus Int. Electronics. Co., LTD. Horustech Electronics. Co., LTD.				PART NO. HRS-9396WR-02S1-XXSN-X				
						.X ±0.30					TITLE 7.92 mm Crimp Style Connectors				
						.XX ±0.20									
						.XXX ±0.10	APPROVAL	CHECK	DRAWN	DATE					
2020/03/23	C	EN20200323001	Update Drawing Frame	Alan qin	Robing	X.° ±2°									
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	 PROJECT	Robing	Jova Lau	Sylvia	2007/05/03	UNIT	SCALE	SHEET	REV	NUMBER
											mm	1:1	1/1	C	A-000